

Armored Sink 19" x 20" – U/M



Kitchen Sinks

Code: 1236 660

AISI 304 Stainless steel
Satin finish
Undermount
x cross bending for easy water draining



DETAILS

Edge/Installation Type	Undermount
Series	Quadra Armored
Texture	Satin
Material	AISI 304 stainless steel
Thickness	16 Gauge (1.5 mm)
Overall dimensions	19" x 19 1/2"
Bowls dimensions	1 bowl 17" x 18"
Bowls depth	10"

Cut out	17" x 18"
---------	-----------

Waste fitting type	3 1/2" - with stainless steel basket
--------------------	--------------------------------------

Bowls bottom	X cross bending for easy water draining
--------------	---

Underside	Protected with heavy duty undercoating
-----------	--

Fixing system	Undermount fixing kit (brass insert and clips)
---------------	--

FEATURES


Diamond-shape bottom	The draining of water is an important feature in a sink, and it's always taken good care of in Foster products. In the bent-welded sinks, which would have a flat bottom, the proper draining is guaranteed by the elegant beveling, which helps the water flow.
----------------------	--


High thickness	1.5 mm thick steel. A significant thickness, which guarantees the maximum sturdiness and durability.
----------------	--

Basket 3,5" waste fitting	The drain is equipped with a large 3.5" drain, with the practical basket cap that prevents the discharge of solid parts.
---------------------------	--

Deep bowls	This bowls reach an important depth, over 20 cm, thanks to the advanced production technology, that can be offer great capieny and practicity in all the washing operations.
------------	--

TECHNICAL DATA

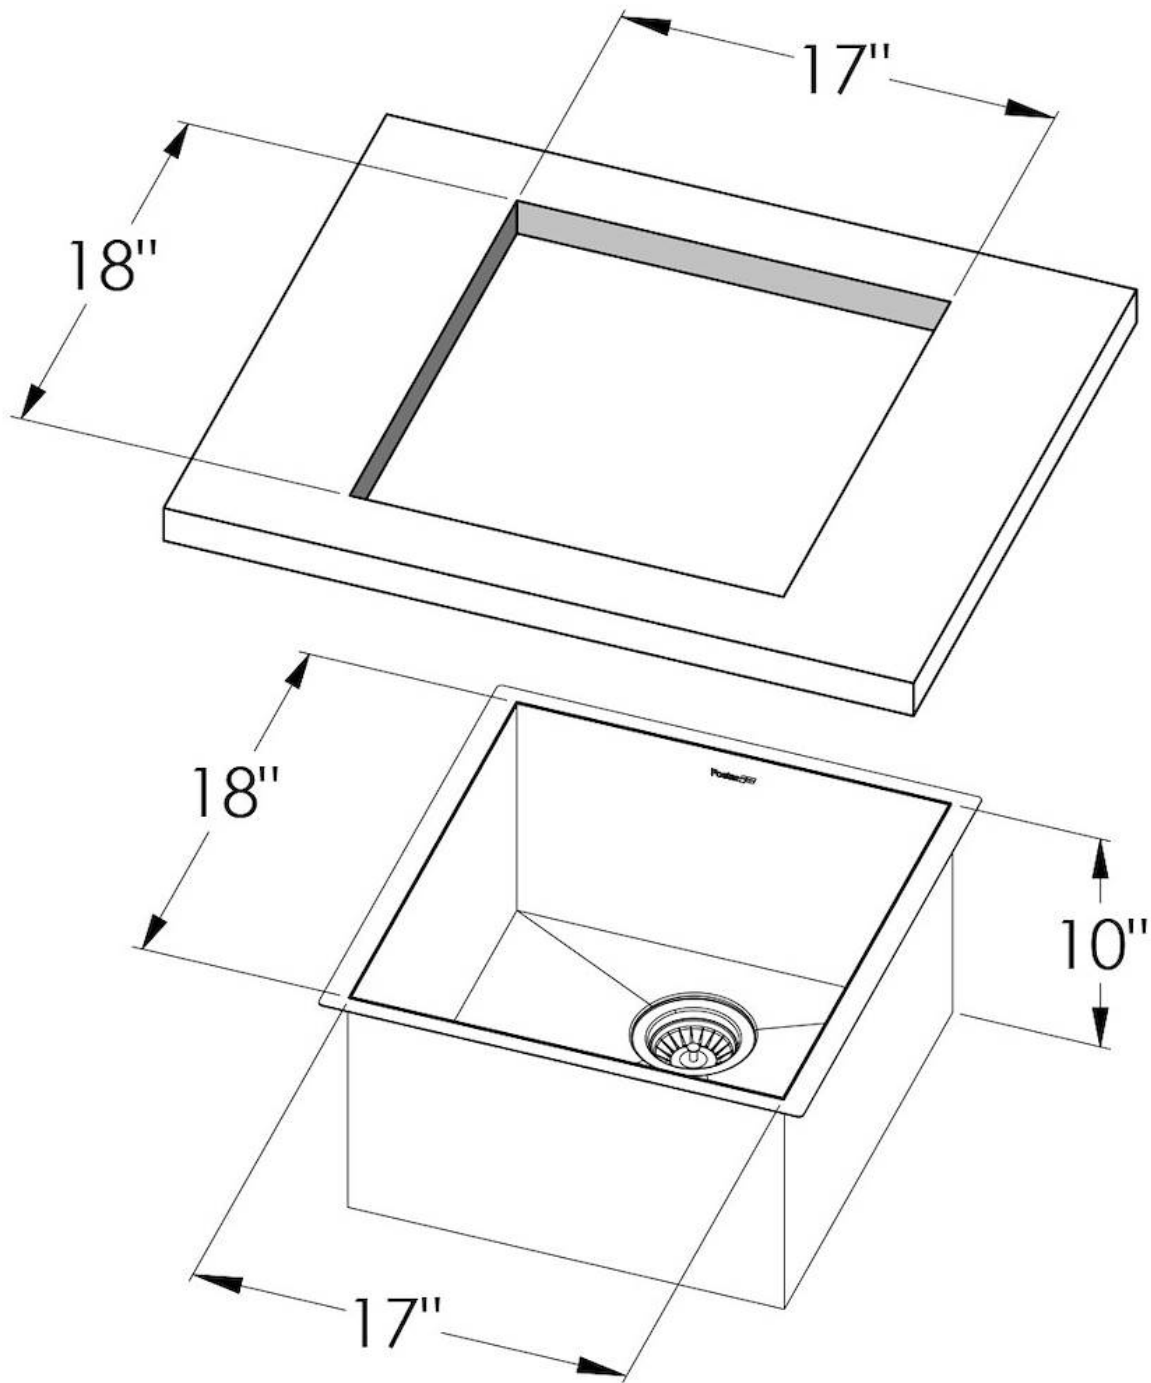


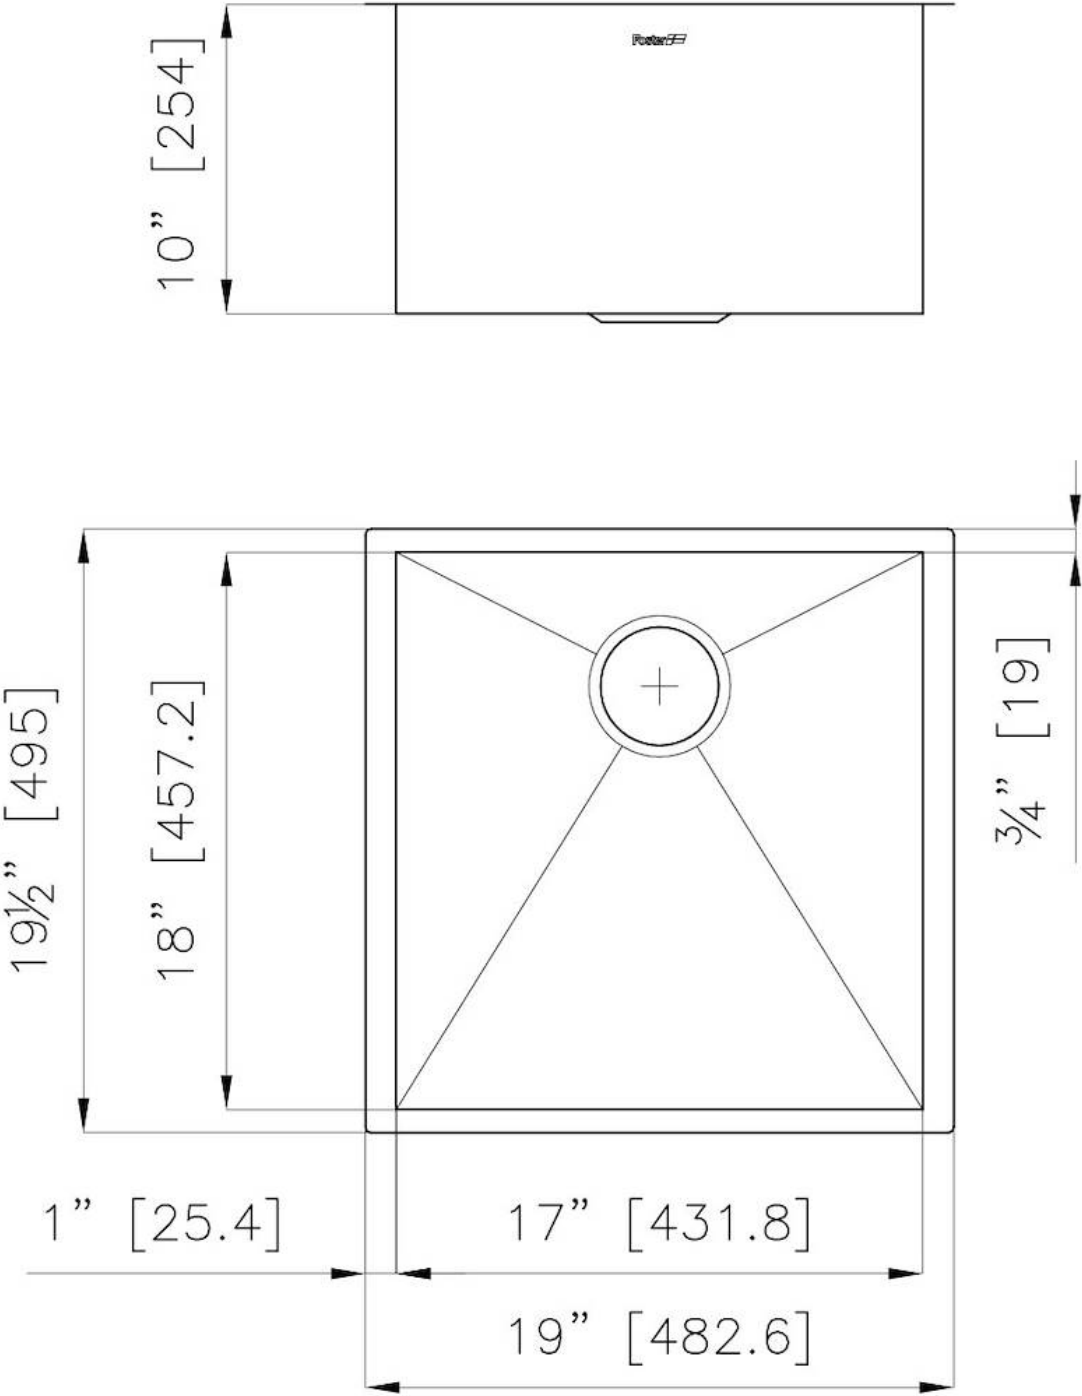

OPTIONAL ACCESSORIES



Waste disposer throat
8669 043



Grid
8100 402



Stainless steel plate rack
8100 154
* only in combination with the accessory
8644 034



Stainless steel perforated pan
8154 000
* only in combination with the accessory
8644 034



Chopping board
8644 034

RECOMMENDED PAIRINGS



Faucet Ponza
8497 025



Faucet Sicilia
8485 005



Milano Cooktop 4 burners inLine
7640 900