



# Professional series Cooktop

## 5 burners Flush mount

Gas cooktops

Code: 7245 962

- AISI 304 Stainless steel
- Satin finish
- Enamelled cast iron grids
- Solid metal knobs
- Gas taps with safety valves



### DETAILS

Finish Foster brushed

Material AISI 304 stainless steel

Series Professional

Texture Satin

Dimensions 34 3/8" x 20 3/16"

Kind of Edge 1 mm – flush edge

Installation Flush-mount or overmount

Flush-mount cut-out See cut-out drawing

|                   |                                                                       |
|-------------------|-----------------------------------------------------------------------|
| Overmount cut-out | 33 <sup>7</sup> / <sub>8</sub> " x 19 <sup>11</sup> / <sub>16</sub> " |
|-------------------|-----------------------------------------------------------------------|

|       |                     |
|-------|---------------------|
| Grids | Enamelled cast iron |
|-------|---------------------|

|                  |       |
|------------------|-------|
| Cooktop controls | Knobs |
|------------------|-------|

|       |             |
|-------|-------------|
| Knobs | Solid Metal |
|-------|-------------|

|        |               |
|--------|---------------|
| Safety | Safety valves |
|--------|---------------|

|                   |            |
|-------------------|------------|
| Total power Btu/h | 31,600 Btu |
|-------------------|------------|

|                |   |
|----------------|---|
| <b>Burners</b> | 5 |
|----------------|---|

|              |              |
|--------------|--------------|
| Triple crown | 11,000 Btu/h |
|--------------|--------------|

|       |             |
|-------|-------------|
| Rapid | 7,600 Btu/h |
|-------|-------------|

|           |                  |
|-----------|------------------|
| Semirapid | 5,100 (2x) Btu/h |
|-----------|------------------|

|           |             |
|-----------|-------------|
| Auxiliary | 2,800 Btu/h |
|-----------|-------------|

|             |   |
|-------------|---|
| Simmer ring | 1 |
|-------------|---|

|             |     |
|-------------|-----|
| Simmer Rate | 900 |
|-------------|-----|

## Technical requirements

|                   |           |
|-------------------|-----------|
| Electrical supply | 120V 60Hz |
|-------------------|-----------|

Gas std setting

Natural Gas

LP Gas conversion

Kit for all burners included

**Notes:**

The accessory 9601 668 (CAST IRON WOK SUPPORT) can only be fitted on the Rapid burner.

## FEATURES

Under-knob ignition

The utmost freedom of movement with electronic under-knob ignition, a common feature of all models that allows a one-hand ignition of the burner.

Special burners

Many Foster hobs are equipped with special burners, with two or three rings of fire that greatly increase the power delivered and the heated surface. In the DUAL models the two fire crowns also have independent ignition, making these burners perfect for both intensive and delicate cooking.


Safe cooking


All Foster cooker hobs are equipped with safety valves. They shut off the gas supply very quickly if the flame accidentally goes out.


Cast iron grids

Cast-iron is the ideal material for an hob grid, this due to the manifold properties characterising it: high heat capacity that improves cooking performance; high weight and stability that improve safety; sturdiness that preserves the hob's original aspect over time; easy cleaning.

## TECHNICAL DATA

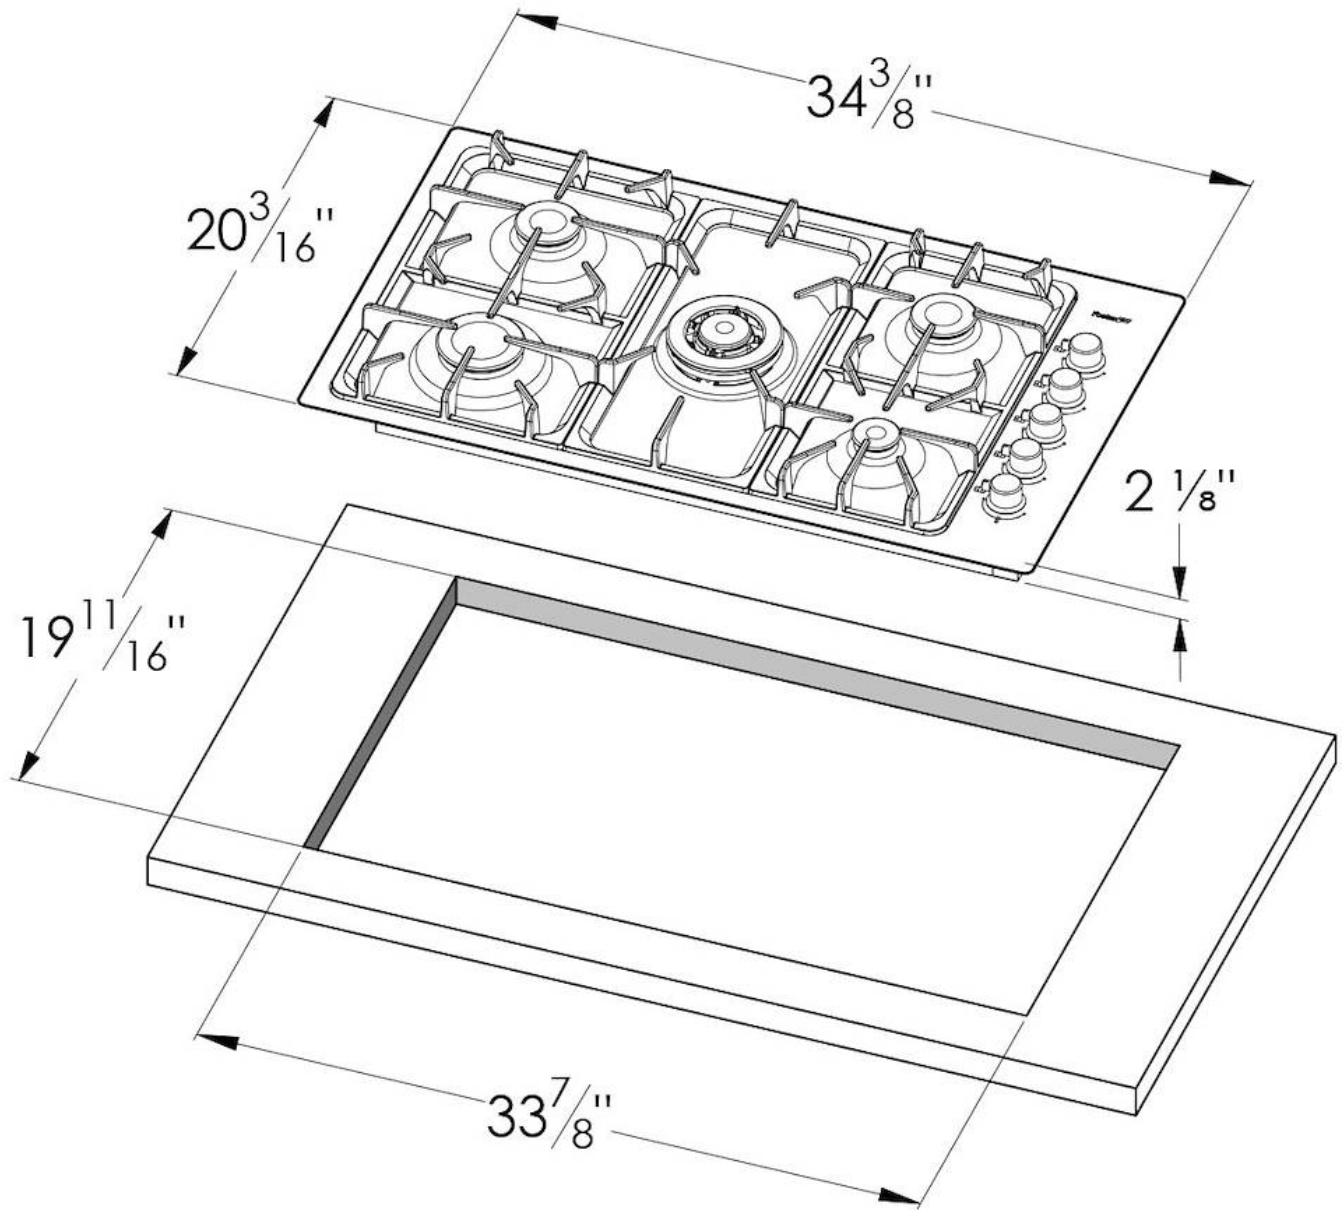

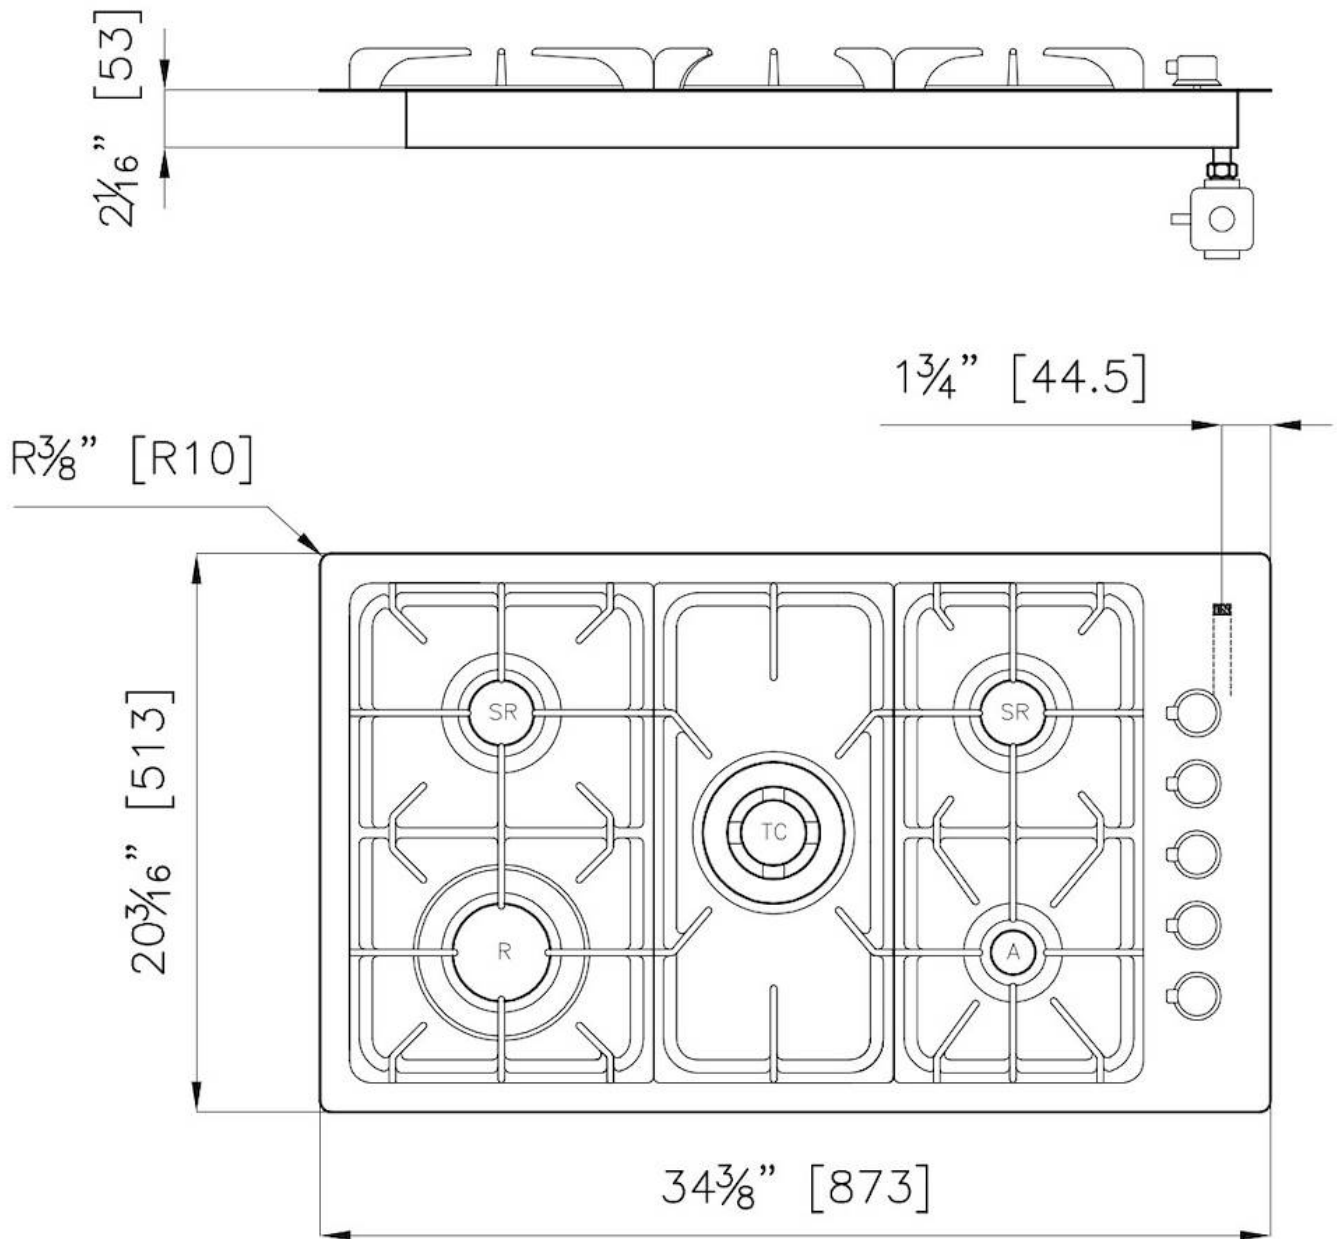

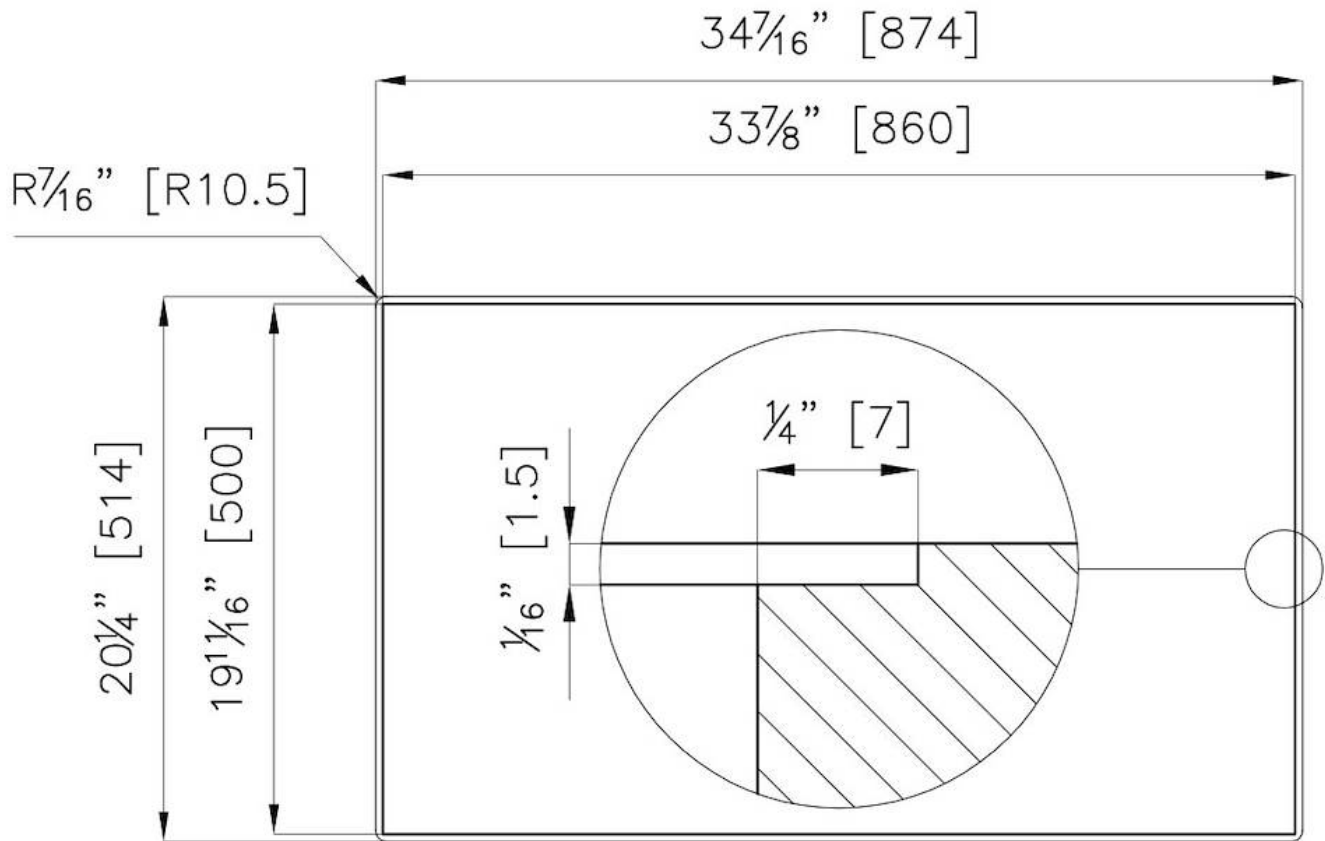

flush-mount  
cut-out size

## RECOMMENDED PAIRINGS



**KE Sink 30" x 17" – U/M**  
2157 863